

ダクタイル T 形鉄直管

形式管種 口径 mm	内面モルタルライニング		内 面 粉 体 塗 装	
	1 種・2 種	3 種	1 種・2 種	3 種
75～ 100	454,000	452,000	454,000	501,000
150	454,000	452,000	454,000	501,000
200～ 250	454,000	499,000	454,000	501,000
300～ 400	458,000	480,000	534,000	560,000
450～ 600	450,000	471,000	525,000	552,000
700～ 800	435,000	457,000	510,000	537,000
900～1200	376,000	396,000	469,000	492,000
1350～1500	376,000	396,000	469,000	492,000

T 形 1 種直管

口 径	1 本価格(円)		1 本当り重量：kg		
	内面モルタル	内面粉体	本 管	ライニング	総重量
75×4	27,830	27,830	61.3	8.93	70.23
100×4	36,140	36,140	79.6	11.9	91.5
150×5	65,380	65,380	144	22.6	166.6
200×5	86,260	86,260	190	30.3	220.3
250×5	107,600	107,600	237	38.1	275.1
300×6	153,890	179,420	336	81.9	417.9
350×6	180,910	210,930	395	95.8	490.8
400×6	231,290	269,670	505	109	614
450×6	270,000	315,000	600	123	723
500×6	315,900	368,550	702	137	839
600×6	435,600	508,200	968	164	1,132

T 形 3 種直管

口 径	1 本価格(円)		1 本当り重量：kg		
	内面モルタル	内面粉体	本 管	ライニング	総重量
75×4	22,870	25,350	50.6	8.93	59.53
100×4	29,560	32,770	65.4	11.9	77.3
150×5	52,880	58,620	117	22.6	139.6
200×5	77,840	78,160	156	30.3	186.3
250×5	96,810	97,190	194	38.1	232.1
300×6	141,120	164,640	294	81.9	375.9
350×6	166,080	193,760	346	95.8	441.8
400×6	203,040	236,880	423	109	532
450×6	238,800	279,860	507	123	630
500×6	282,130	330,650	599	137	736
600×6	378,210	443,260	803	164	967


※直管は接合附属品（T 形ゴム輪）を含む価格です。

ダクタイル T 形ジョイント附属品（T ゴム輪）




口 径	価格(円)	口 径	価格(円)
75	910	350	6,510
100	1,290	400	7,500
150	1,730	450	9,960
200	2,260	500	12,410
250	3,000	600	14,920
300	5,510		

寸法及び質量表

T形ダクタイル鑄鉄管

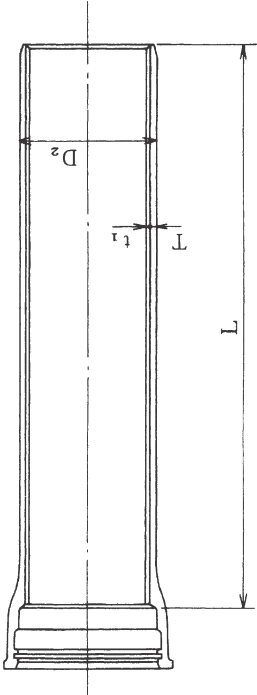

接合部詳細



単位:mm

呼び径	管 厚			ライ ニ ング 厚	外径	各 部 寸 法					有効長	参 考 質 量 (kg)										呼び径																			
	D	T				D ₁	D _{1.5}	D ₂	D _{2.5}	D ₃		D _{3.5}	D ₄	D _{4.5}	ライ ニ ング	1 本 当 た り																									
		D	D ₁													D _{1.5}	D ₂	D _{2.5}	D ₃	D _{3.5}	D ₄		D _{4.5}	ライ ニ ング	鉄 部																
																									D ₁	D _{1.5}	D ₂	D _{2.5}	D ₃	D _{3.5}	D ₄	D _{4.5}	D ₁	D _{1.5}	D ₂	D _{2.5}	D ₃	D _{3.5}	D ₄	D _{4.5}	ライ ニ ング
75	7.5	—	—	—	6.0	—	—	—	—	—	11.73	—	—	—	2.23	61.3	—	—	—	50.6	—	—	—	8.93																	
100	7.5	—	—	—	6.0	—	—	—	—	—	15.09	—	—	—	2.99	79.6	—	—	—	65.4	—	—	—	11.9																	
150	7.5	—	—	—	6.0	—	—	—	—	—	21.97	—	—	—	4.52	144	—	—	—	117	—	—	—	22.6																	
200	7.5	—	—	—	6.0	—	—	—	—	—	28.84	—	—	—	6.06	190	—	—	—	156	—	—	—	30.3																	
250	7.5	—	—	—	6.0	—	—	—	—	—	35.80	—	—	—	7.62	237	—	—	—	194	—	—	—	38.1																	
300	7.5	—	—	—	6.5	—	—	—	—	—	46.18	—	—	—	13.65	336	—	—	—	294	—	—	—	81.9																	
350	7.5	—	—	—	6.5	—	—	—	—	—	53.66	—	—	—	15.97	395	—	—	—	346	—	—	—	95.8																	
400	8.5	—	7.5	—	7.0	—	—	—	—	—	65.82	—	—	—	18.21	505	—	450	—	423	—	—	—	109																	
450	9.0	—	8.0	—	7.5	—	—	—	—	—	79.06	—	—	—	20.48	600	—	538	—	507	—	—	—	123																	
500	9.5	—	8.5	—	8.0	—	—	—	—	—	93.44	—	—	—	22.76	702	—	633	—	599	—	—	—	137																	
600	11.0	—	10.0	—	9.0	—	8.5	—	—	—	125.70	—	118.82	—	27.27	968	—	886	—	803	—	762	—	164																	
700	12.0	—	11.0	—	10.0	—	9.0	—	—	—	162.40	—	146.37	—	42.28	1240	—	1140	—	1040	—	948	—	254																	
800	13.5	—	12.0	—	11.0	—	10.0	—	—	—	203.85	—	185.54	—	48.32	1580	—	1420	—	1310	—	1200	—	290																	
900	15.0	—	13.0	—	12.0	—	11.0	—	—	—	249.87	—	229.30	—	54.35	1980	—	1730	—	1610	—	1480	—	326																	
1000	16.5	—	14.5	—	13.0	—	12.0	—	—	—	300.19	—	277.37	—	75.25	2410	—	2140	—	1940	—	1800	—	452																	
1100	18.0	—	15.5	—	14.0	—	13.0	—	—	—	355.36	—	330.27	—	82.79	2900	—	2520	—	2300	—	2150	—	497																	
1200	19.5	—	17.0	—	15.0	—	13.5	—	—	—	414.77	—	373.75	—	90.25	3420	—	3010	—	2680	—	2440	—	542																	
1350	21.5	—	18.5	—	16.5	—	15.0	—	—	—	512.77	—	466.66	—	121.69	4260	—	3710	—	3340	—	3060	—	730																	
1500	23.5	—	20.5	—	18.0	—	16.5	—	—	—	621.04	—	569.84	—	135.26	5190	—	4580	—	4070	—	3760	—	812																	
1600	25.0	23.5	22.0	20.5	19.0	18.0	17.5	16.0	15	1650.0	1654.0	1783	275	23.0	8.5	4000	396	912.54	858.57	804.51	750.35	696.09	659.86	641.72	587.26	179.26	4050	3610	3400	3180	3040	2960	2750	717	1600						
																4960	4690	4690	4420	4150	3880	3700	3600	3330	896																
1650	25.5	24.0	22.5	21.0	19.5	18.5	18.0	16.5	15	1701.0	1705.0	1836	280	23.0	8.5	4000	428	959.71	904.07	848.32	792.47	736.53	699.17	680.48	624.33	587.26	179.26	4050	3610	3400	3180	3040	2960	2750	717	1650					
																5230	4950	4670	4390	4110	3830	3550	3350	3150	2930	2740	740														
1800	28.0	26.0	24.0	22.5	21.0	20.0	19.5	18.0	15	1848.0	1852.0	1991	305	26.0	9.5	5000	534	1144.69	1064.09	983.32	922.61	861.82	821.22	800.92	739.91	680.48	624.33	587.26	179.26	4050	3610	3400	3180	3040	2960	2750	717	1800			
																5510	5110	4790	4470	4220	3980	3820	3550	3350	3150	2930	2740														
2000	30.5	28.5	26.5	25.0	23.5	22.0	21.0	19.5	15	2061.0	2065.0	2214	335	26.0	9.5	5000	708	1391.10	1301.16	1211.05	1143.34	1075.53	1007.62	962.29	894.21	821.22	800.92	739.91	680.48	624.33	587.26	179.26	4050	3610	3400	3180	3040	2960	2750	717	2000
																6270	5910	5550	5280	5010	4740	4560	4290	4090	3890	3690	3490	3290	3090	2890	2690	2490	2290	2090	1890	1690	1490	1290			

備考 受口突部及び直部1mの参考質量は、有効数字に丸めたので、その総和である1本当たりの参考質量とは必ずしも一致しない。