

農業用ダクトイル鋳鉄管

K 形 A 種管

口 径	1 本価格(円)	1 本当り重量 (kg)		
		本 管	セメント ライニング	総重量
600×6000	341,900	729	164	893
700×6000	400,920	905	254	1159
800×6000	509,450	1150	290	1440
900×6000	549,120	1430	326	1756
1000×6000	668,160	1740	452	2192
1100×6000	764,160	1990	497	2487
1200×6000	871,680	2270	542	2812
1350×6000	1,094,400	2850	730	3580
1500×6000	1,340,160	3490	812	4302

K 形 B 種管

口 径	1 本価格(円)	1 本当り重量 (kg)		
		本 管	セメント ライニング	総重量
300×6000	111,620	238	81.9	319.9
350×6000	130,380	278	95.8	373.8
400×6000	162,270	346	109	455
450×6000	196,980	420	123	543
500×6000	235,910	503	137	640
600×6000	322,670	688	164	852
700×6000	379,650	857	254	1111
800×6000	482,870	1090	290	1380
900×6000	499,200	1300	326	1626
1000×6000	614,400	1600	452	2052
1100×6000	706,560	1840	497	2337
1200×6000	840,000	2100	542	2642
1350×6000	1,028,000	2570	730	3300
1500×6000	1,276,000	3190	812	4002

T 形 A 種管

口 径	1 本価格(円)	1 本当り重量 (kg)		
		本 管	セメント ライニング	総重量
600×6000	338,150	721	164	885
700×6000	392,400	900	254	1154
800×6000	497,040	1140	290	1430
900×6000	523,980	1420	326	1746
1000×6000	638,370	1730	452	2182
1100×6000	734,310	1990	497	2487
1200×6000	948,860	2270	542	2812
1350×6000	1,203,840	2880	730	3610
1500×6000	1,488,080	3560	812	4372

接合付属品（T 形ゴム輪）を含む価格です。

T 形 B 種管

口 径	1 本価格(円)	1 本当り重量 (kg)		
		本 管	セメント ライニング	総重量
300×6000	108,340	231	81.9	312.9
350×6000	128,040	273	95.8	368.8
400×6000	158,990	339	109	448
450×6000	194,170	414	123	537
500×6000	232,160	495	137	632
600×6000	318,450	679	164	843
700×6000	371,040	851	254	1105
800×6000	475,240	1090	290	1380
900×6000	479,700	1300	326	1626
1000×6000	586,710	1590	452	2032
1100×6000	678,960	1840	497	2337
1200×6000	917,850	2110	542	2652
1350×6000	1,131,000	2600	730	3330
1500×6000	1,413,750	3250	812	4062

接合付属品（T 形ゴム輪）を含む価格です。

T 形 D 種管



口 径	1 本価格(円)	1 本当り重量 (kg)		
		本 管	セメント ライニング	総重量
800×6000	433,250	978	290	1268
900×6000	445,770	1170	326	1496
1000×6000	529,590	1390	452	1842
1100×6000	617,220	1620	497	2117
1200×6000	857,460	1860	542	2402
1350×6000	1,069,520	2320	730	2862
1500×6000	1,309,240	2840	812	2652

接合付属品（T 形ゴム輪）を含む価格です。

寸法及び質量表

T形ダクタイル鋳鉄直管

接合部詳細

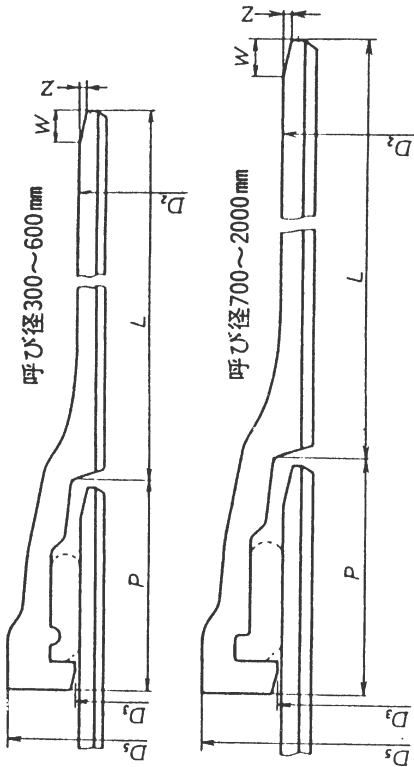
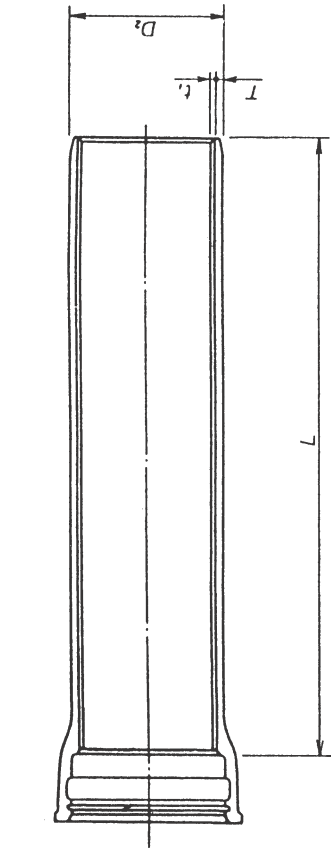


単位 mm

呼び径	管 厚			ライ ニ ン グ 厚	外 径	各 部 寸 法				有効長	質 量 (kg)										呼び径				
	T					D ₃	D ₅	P	W		Z	L	受 口 突 部	直 部				1 m		1 本 当 た り					
	DA	DB	DC											DD	DA	DB	DC	DD	ライニン グ	DA		DB	DC	DD	ライニン グ
D	—	5.0	—	—	6	322.8	325.8	386	115	9.5	3.2	6000	17.3	—	35.69	—	—	13.65	—	231	—	—	—	81.9	300
300	—	5.0	—	—	6	374.0	377.6	450	130	14.0	5.0	6000	24.4	—	41.44	—	—	15.97	—	273	—	—	—	95.8	350
400	—	5.5	—	—	6	425.6	429.2	502	130	14.0	5.0	6000	27.6	—	51.90	—	—	18.21	—	339	—	—	—	109	400
450	—	6.0	—	—	6	476.8	480.4	555	130	14.0	5.0	6000	32.8	—	63.45	—	—	20.48	—	414	—	—	—	123	450
500	—	6.5	—	—	6	528.0	531.6	608	135	14.0	5.0	6000	37.9	—	76.14	—	—	22.76	—	495	—	—	—	137	500
600	8.0	7.5	—	—	6	630.8	634.4	713	140	14.0	5.0	6000	49.1	—	111.92	105.01	—	27.27	721	679	—	—	—	164	600
700	8.5	8.0	—	—	8	733.0	737.0	826	155	15.0	6.0	6000	69.6	—	138.33	130.28	—	42.28	900	851	—	—	—	254	700
800	9.5	9.0	—	8.0	8	836.0	840.0	931	160	15.0	6.0	6000	85.4	—	176.37	167.19	—	148.79	48.32	1140	1090	—	978	290	800
900	10.5	9.5	—	8.5	8	939.0	943.0	1036	175	15.0	6.0	6000	108	—	218.99	198.35	—	177.66	54.35	1420	1300	—	1170	326	900
1000	11.5	10.5	—	9.0	10	1041.0	1045.0	1148	185	19.0	7.5	6000	135	—	265.94	243.05	—	208.63	75.25	1730	1580	—	1390	452	1000
1100	12.0	11.0	—	9.5	10	1144.0	1148.0	1253	200	19.0	7.5	6000	164	—	305.13	279.95	—	242.09	82.79	1990	1840	—	1620	497	1100
1200	12.5	11.5	—	10.0	10	1246.0	1250.0	1357	215	19.0	7.5	6000	196	—	346.34	318.89	—	277.64	90.25	2270	2110	—	1860	542	1200
1350	14.0	12.5	—	11.0	12	1400.0	1404.0	1523	235	23.0	8.5	6000	265	—	435.86	389.58	—	343.20	121.69	2880	2600	—	2320	730	1350
1500	15.5	14.0	—	12.0	12	1554.0	1558.0	1685	260	23.0	8.5	6000	343	—	535.65	484.29	—	415.64	135.26	3560	3250	—	2840	812	1500
1600	16.0	14.5	13.5	12.5	15	1650.0	1654.0	1783	275	23.0	8.5	4000	396	—	587.26	532.69	496.26	459.78	179.26	2750	2530	2380	2240	717	1600
1650	16.5	15.0	14.0	13.0	15	1701.0	1705.0	1836	280	23.0	8.5	4000	428	—	624.33	568.07	530.52	492.91	184.91	2930	2700	2550	2400	740	1650
1800	18.0	16.0	15.0	14.0	15	1848.0	1852.0	1991	305	26.0	9.5	4000	534	—	739.91	658.42	617.60	576.74	200.97	3490	3170	3000	2840	804	1800
2000	19.5	18.0	16.5	15.0	15	2061.0	2065.0	2214	335	26.0	9.5	5000	708	—	894.21	826.03	757.75	689.37	224.50	4290	4010	3740	3470	898	2000

備考 受口突部及び直部1mの質量は、有効数字に丸めたので、その総和である1本当たりの質量とは必ずしも一致しない。





K形兩受曲管 (1)

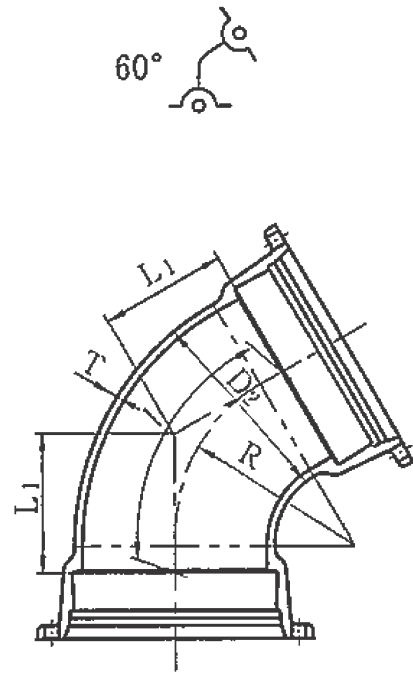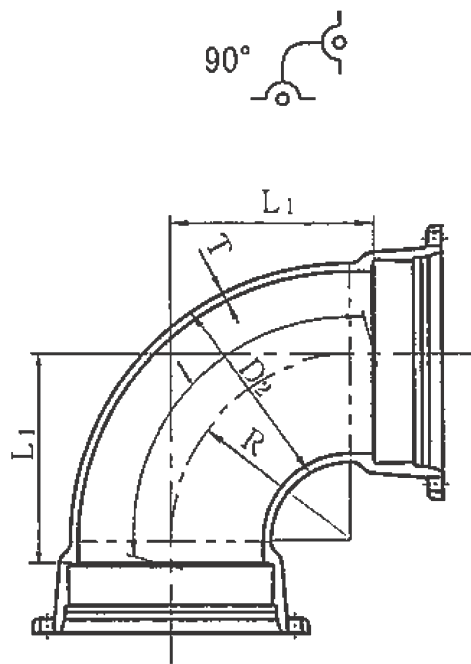

単位 mm

呼び径	管厚	外径	90°				60°			
			各部寸法		管心長	参考質量 (kg)	各部寸法		管心長	参考質量 (kg)
D	T	D ₂	R	L ₁	l		R	L ₁	l	
300	12.5	322.8	290	350	576	97.3	290	230	429	84.6
350	13.0	374.0	340	400	654	125	340	260	483	107
400	14.0	425.6	390	455	743	164	390	290	538	137
450	14.5	476.8	435	500	813	203	435	320	593	170
500	15.0	528.0	485	555	902	248	485	350	648	204
600	16.0	630.8	580	650	1051	348	580	405	748	281
700	17.0	733.0	680	755	1218	485	680	465	857	386
800	18.0	836.0	775	855	1377	640	775	525	967	504
900	19.0	939.0	870	930	1487	810	870	565	1036	633
1000	20.0	1041.0	965	1025	1636	1030	965	620	1136	803
1100	21.0	1144.0	1055	1120	1787	1280	1055	675	1237	987
1200	22.0	1246.0	1145	1215	1939	1550	1145	730	1337	1190
1350	24.0	1400.0	1165	1240	1980	1940	1165	745	1365	1480
1500	26.0	1554.0	1205	1280	2043	2390	1205	775	1420	1830







K形兩受曲管 (2)

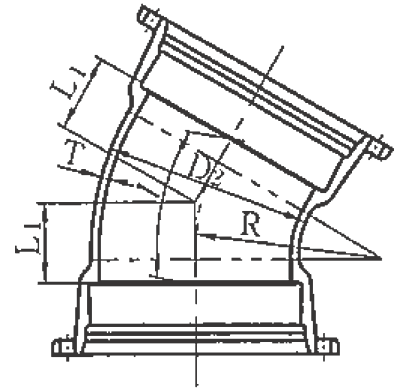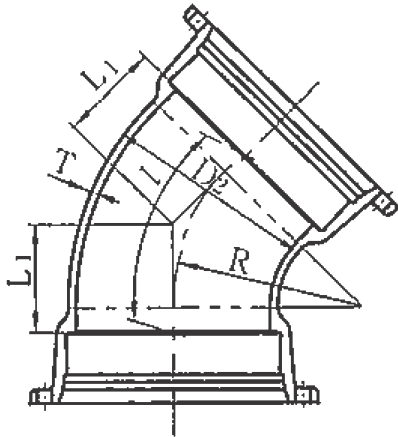

単位 mm

呼び径	管厚	外径	45°				30°			
			各部寸法		管心長	参考質量 (kg)	各部寸法		管心長	参考質量 (kg)
D	T	D ₂	R	L ₁	l		R	L ₁	l	
300	12.5	322.8	290	180	348	77.5	290	140	276	71.3
350	13.0	374.0	340	205	395	98.1	340	155	306	88.6
400	14.0	425.6	390	225	433	124	390	170	335	111
450	14.5	476.8	435	250	481	153	435	185	365	135
500	15.0	528.0	485	270	519	182	485	200	394	161
600	16.0	630.8	580	310	595	247	580	225	443	214
700	17.0	733.0	680	355	681	338	680	255	502	289
800	18.0	836.0	775	400	767	438	775	285	560	369
900	19.0	939.0	870	420	803	541	870	295	579	453
1000	20.0	1041.0	965	460	878	685	965	320	628	570
1100	21.0	1144.0	1055	505	965	843	1055	350	687	696
1200	22.0	1246.0	1145	545	1041	1010	1145	375	736	825
1350	24.0	1400.0	1080	520	994	1200	1080	360	707	992
1500	26.0	1554.0	1140	550	1051	1500	1140	385	756	1240



K形兩受曲管 (3)



単位 mm

呼び径	管厚	外径	22 1/2°				11 1/4°				5 5/8°			
			各部寸法		管心長	参考質量 (kg)	各部寸法		管心長	参考質量 (kg)	各部寸法		管心長	参考質量 (kg)
D	T	D ₂	R	L ₁	l	(kg)	R	L ₁	l	(kg)	R	L ₁	l	(kg)
300	12.5	322.8	290	120	239	68.0	290	90	180	62.9	290	75	150	60.3
350	13.0	374.0	340	130	258	83.6	340	95	190	76.4	340	80	160	73.3
400	14.0	425.6	390	140	278	104	390	105	210	94.7	390	85	170	89.6
450	14.5	476.8	435	155	308	127	435	110	220	113	435	90	180	107
500	15.0	528.0	485	165	328	149	485	120	240	134	485	95	190	125
600	16.0	630.8	580	185	367	197	580	130	260	173	580	100	200	160
700	17.0	733.0	680	210	417	266	680	140	280	228	680	110	220	212
800	18.0	836.0	775	230	456	335	775	155	310	286	775	115	230	260
900	19.0	939.0	870	235	466	409	870	145	289	340	870	105	210	308
1000	20.0	1041.0	965	255	505	514	965	155	309	424	965	110	220	383
1100	21.0	1144.0	1055	275	545	620	1055	170	339	512	1055	120	240	459
1200	22.0	1246.0	1145	295	584	733	1145	180	359	597	1145	125	250	531
1350	24.0	1400.0	970	265	525	857	731	145	290	683	731	110	220	631
1500	26.0	1554.0	1020	280	555	1060	783	155	310	842	783	115	230	771


K 形曲管

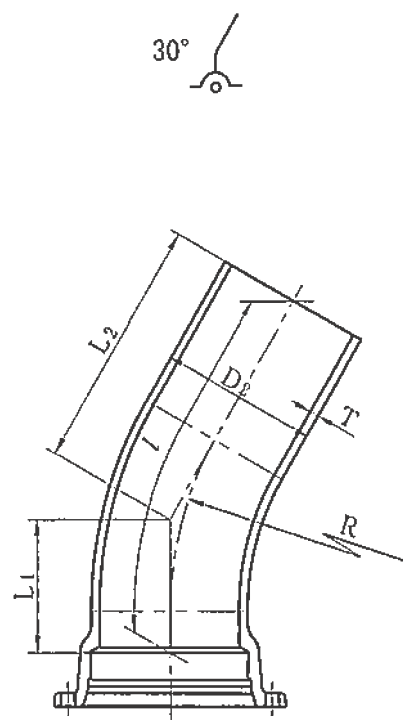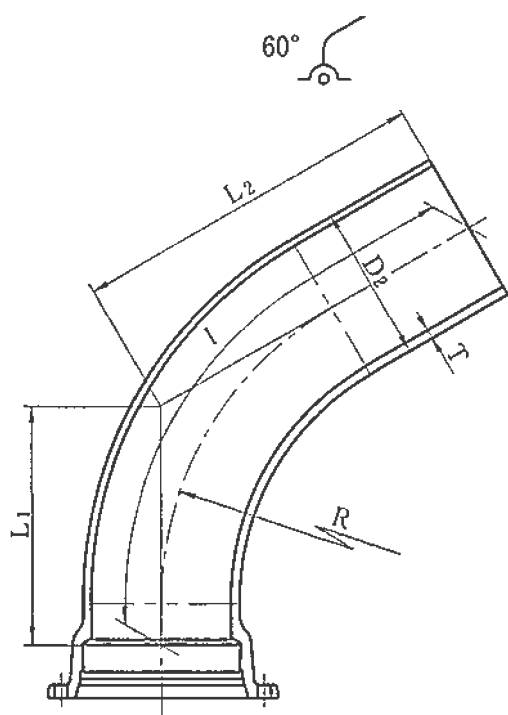

単位 mm

呼び径	管厚	外径	60°					30°				
			各部寸法			管心長 <i>l</i>	参考 質量 (kg)	各部寸法			管心長 <i>l</i>	参考 質量 (kg)
			R	L ₁	L ₂			R	L ₁	L ₂		
D	T	D ₂										
600	16	630.8	800	510	670	1094	300	1300	400	560	944	266
700	17	733.0	900	580	740	1223	410	1500	460	620	1062	366
800	18	836.0	1000	640	810	1342	536	1700	510	690	1179	482
900	19	939.0	1100	700	880	1462	687	1900	570	750	1297	622
1000	20	1041.0	1150	730	910	1516	837	2100	630	810	1414	790
1100	21	1144.0	1200	760	950	1581	1000	2300	680	880	1532	977
1200	22	1246.0	1200	760	960	1591	1150	2300	690	890	1552	1130
1350	24	1400.0	1200	770	980	1621	1440	2300	690	900	1562	1390
1500	26	1554.0	1200	770	990	1631	1740	2300	700	920	1592	1700

K形両受フランジ付きT字管

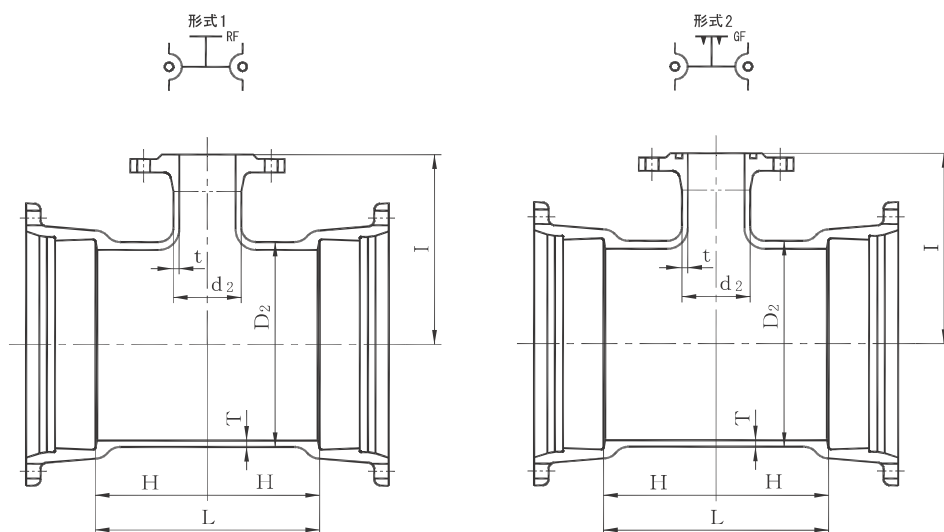


単位 mm


呼び径		管厚		外径		各部寸法			参考質量 (kg)			
D	d	T	t	D ₂	d ₂	H	I	L	形式 1		形式 2	
									7.5K	10K	7.5K	10K
300	75	12.5	10	322.8	93.0	190	350	380	87.3	85.8	87.2	85.7
300	100	12.5	10	322.8	118.0	190	350	380	88.9	87.1	88.7	86.9
350	75	13.0	10	374.0	93.0	250	380	500	116	115	116	115
350	100	13.0	10	374.0	118.0	250	380	500	118	116	118	116
400	75	14.0	10	425.6	93.0	260	320	520	140	139	140	139
400	100	14.0	10	425.6	118.0	260	400	520	143	142	143	141
450	75	14.5	10	476.8	93.0	270	340	540	167	165	167	165
450	100	14.5	10	476.8	118.0	270	400	540	169	168	169	168
500	75	15.0	10	528.0	93.0	280	360	560	194	193	194	193
500	100	15.0	10	528.0	118.0	280	400	560	196	195	196	194
600	75	16.0	11	630.8	93.0	290	410	580	249	248	249	248
600	100	16.0	11	630.8	118.0	290	450	580	251	249	251	249
700	75	17.0	12	733.0	93.0	350	480	700	349	348	349	348
700	100	17.0	12	733.0	118.0	350	480	700	350	349	350	348
800	75	18.0	13	836.0	93.0	360	520	720	428	426	428	426
800	100	18.0	13	836.0	118.0	360	520	720	429	427	429	427
800	600	18.0	16	836.0	630.8	470	670	940	565	565	564	564
900	100	19.0	14	939.0	118.0	300	590	600	469	467	469	467
900	600	19.0	16	939.0	630.8	600	690	1200	757	757	756	756
1000	150	20.0	15	1041.0	169.0	320	640	640	586	585	586	585
1000	600	20.0	16	1041.0	630.8	680	770	1360	969	969	968	968
1100	150	21.0	16	1144.0	169.0	340	700	680	703	703	703	703
1100	600	21.0	16	1144.0	630.8	650	800	1300	1080	1080	1080	1080
1200	150	22.0	17	1246.0	169.0	360	750	720	827	826	827	826
1200	600	22.0	17	1246.0	630.8	680	860	1360	1260	1260	1260	1260
1350	150	24.0	19	1400.0	169.0	380	830	760	1040	1040	1040	1040
1350	600	24.0	19	1400.0	630.8	700	950	1400	1570	1570	1570	1570
1500	150	26.0	21	1554.0	169.0	420	910	840	1330	1330	1330	1330
1500	600	26.0	21	1554.0	630.8	730	1050	1460	1940	1940	1940	1940

K 形用接合部品


押 輪

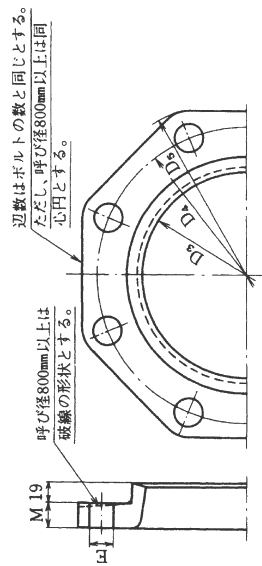

ゴム輪

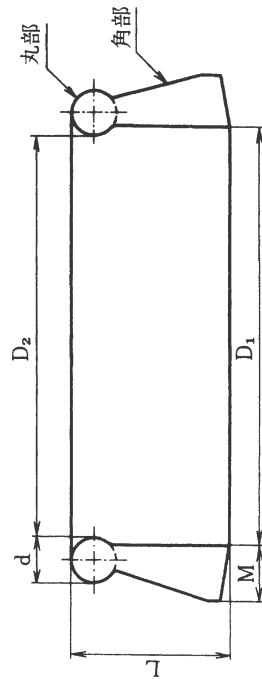

T 頭ボルト・ナット

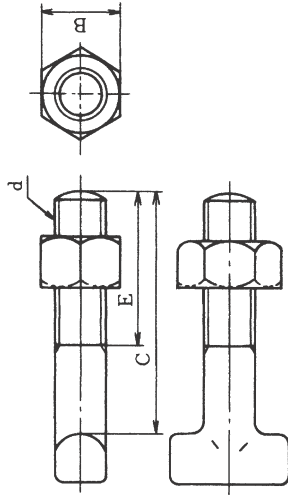

呼び径	各 部 寸 法					ボルト の数	参考質量 (kg)
	D ₃	D ₄	D ₅	E	M		
75	97.0	159	197	19	15	4	1.87
100	122.0	186	232	23	16	4	2.49
150	173.0	241	287	23	17	6	4.27
200	224.0	292	338	23	18	6	5.31
250	275.6	348	394	23	19	8	7.53
300	326.8	399	445	23	20	8	8.91
350	378.0	458	504	23	21	10	11.9
400	429.6	512	558	23	22	12	14.6
450	480.8	567	613	23	23	12	17.2
500	532.0	618	664	23	24	14	19.9
600	634.8	725	771	23	25	14	24.9
700	738.0	839	893	27	26	16	35.2
800	841.0	942	996	27	28	20	42.1
900	944.0	1052	1118	33	29	20	53.9
1000	1047.0	1160	1226	33	30	20	63.2
1100	1150.0	1266	1332	33	31	24	72.1
1200	1253.0	1372	1438	33	32	28	81.3
1350	1407.0	1536	1602	33	33	28	99.4
1500	1561.0	1700	1766	33	35	28	123
1600	1658.0	1790	1856	33	35	30	128
1650	1709.0	1844	1910	33	36	30	137
1800	1856.0	1996	2062	33	38	34	160
2000	2069.0	2216	2282	33	40	36	194
2100	2172.0	2322	2388	33	42	38	216
2200	2288.0	2441	2507	33	43	40	235
2400	2466.0	2626	2692	33	46	44	279
2600	2692.0	2862	2928	33	49	48	344

呼び径	各 部 寸 法					M
	D ₁	D ₂	d	L	M	
75	91	87	10	45	17	17
100	116	112	10	45	17	17
150	165	161	10	45	17	17
200	216	212	10	45	17	17
250	266	262	10	45	17	17
300	316	310	14	49	17	17
350	366	360	14	49	17	17
400	416	410	14	49	17	17
450	468	462	14	49	17	17
500	518	512	14	49	17	17
600	620	614	14	49	17	17
700	718	712	17	61	21	21
800	818	812	17	61	21	21
900	918	912	17	61	21	21
1000	1018	1011	18	62	21	21
1100	1119	1112	18	62	21	21
1200	1220	1213	18	62	21	21
1350	1370	1363	18	62	21	21
1500	1520	1513	18	62	21	21
1600	1620	1613	20	80	25	25
1650	1670	1663	20	80	25	25
1800	1820	1813	20	80	25	25
2000	2020	2013	20	80	25	25
2100	2120	2113	20	80	25	25
2200	2230	2223	20	80	25	25
2400	2410	2403	20	80	25	25
2600	2630	2622	23	93	30	30

呼び径	ね の呼び 径	各 部 寸 法			1 セッ トの数
		C	E	B	
75	M16	85	55	24	4
100	M20	90	60	30	4
150	M20	90	60	30	6
200	M20	90	60	30	6
250	M20	90	60	30	8
300	M20	100	65	30	8
350	M20	100	65	30	10
400	M20	110	65	30	12
450	M20	110	65	30	12
500	M20	110	65	30	14
600	M20	120	65	30	14
700	M24	120	75	36	16
800	M24	120	75	36	20
900	M30	130	85	46	20
1000	M30	130	85	46	20
1100	M30	140	85	46	24
1200	M30	140	85	46	28
1350	M30	150	85	46	28
1500	M30	150	85	46	28
1600	M30	150	85	46	30
1650	M30	150	85	46	30
1800	M30	150	85	46	34
2000	M30	160	90	46	36
2100	M30	160	90	46	38
2200	M30	170	90	46	40
2400	M30	170	90	46	44
2600	M30	180	100	46	48