

離脱防止押輪 全周型 CMA

- 1、押輪のボルト孔相互間に設けられた押しボルト、弓形爪により構成
- 2、弓形爪は皿ばね状で、管外周の60～92%を拘束
- 3、ダクタイル鋳鉄管の内面モルタルライニングには悪影響を与えません。




(単位:円)

呼び径	本体	付属品価格							酸化被膜 組価格	合金 組価格	SUS304 組価格	呼び径
		T頭ボルト・ナット						Kゴム輪				
		酸化被膜		合金		SUS304						
		単価	価格	単価	価格	単価	価格					
75	8,090	430	1,720	650	2,600	2,220	8,880	1,760	11,570	12,450	18,730	75
100	9,640	510	2,040	730	2,920	3,140	12,560	1,970	13,650	14,530	24,170	100
150	14,390	510	3,060	730	4,380	3,140	18,840	2,750	20,200	21,520	35,980	150
200	17,830	510	3,060	730	4,380	3,140	18,840	3,430	24,320	25,640	40,100	200
250	24,460	510	4,080	730	5,840	3,140	25,120	4,420	32,960	34,720	54,000	250
300	27,610	580	4,640	840	6,720	3,180	25,440	7,830	40,080	42,160	60,880	300
350	43,540	580	5,800	840	8,400	3,180	31,800	9,560	58,900	61,500	84,900	350
400	56,180	650	7,800	950	11,400	3,270	39,240	10,690	74,670	78,270	106,110	400
450	64,890	650	7,800	950	11,400	3,270	39,240	11,570	84,260	87,860	115,700	450
500	74,220	650	9,100	950	13,300	3,270	45,780	12,060	95,380	99,580	132,060	500
600	92,990	690	9,660	1,050	14,700	3,370	47,180	12,890	115,540	120,580	153,060	600
700	139,400	1,100	17,600	1,490	23,840	6,020	96,320	17,750	174,750	189,990	253,470	700
800	185,560	1,100	22,000	1,490	29,800	6,020	120,400	21,810	229,370	237,170	327,770	800
900	352,070	1,610	32,200	2,240	44,800	9,300	186,000	23,070	407,340	419,940	561,140	900
1000	376,330	1,610	32,200	2,240	44,800	9,300	186,000	29,500	438,030	450,630	591,830	1000
1100	500,830	1,640	39,360	2,380	57,120	9,500	228,000	36,210	576,400	594,160	765,040	1100
1200	590,890	1,640	45,920	2,380	66,640	9,500	266,000	37,920	674,730	695,450	894,810	1200
1350	666,470	1,770	49,560	2,540	71,120	10,320	288,960	51,630	767,660	789,220	1,007,060	1350
1500	1,137,100	1,770	49,560	2,540	71,120	10,320	288,960	56,550	1,243,210	1,264,770	1,482,610	1500
1600	1,373,500	1,770	53,100	2,540	76,200	10,320	309,600	96,140	1,522,740	1,545,840	1,779,240	1600
1650	1,459,060	1,770	53,100	2,540	76,200	10,320	309,600	100,760	1,612,920	1,636,020	1,869,420	1650
1800	1,853,300	1,770	60,180	2,540	86,360	10,320	350,880	110,550	2,024,030	2,050,210	2,314,730	1800

※ 同芯ゴム輪K形を用いれば、現場で簡単に芯出しができます(φ75～700)。

(mm)

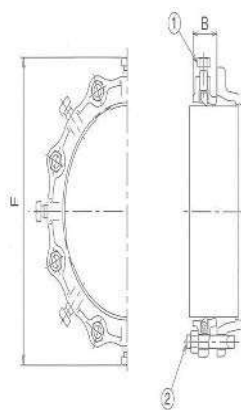

呼び径	F	B	①押しボルト	②T頭ボルト	重量(kg)		呼び径
					本体のみ	組 酸化被膜	
75	229	51	2-M20×38	4 -M16× 85	2.30	3.41	75
100	260	52	2-M20×40	4 -M20× 90	3.10	4.94	100
150	313	54	3-M20×40	6 -M20× 90	4.90	7.63	150
200	366	52	6-M20×40		6.20	9.03	200
250	419	58	8-M20×40	8 -M20× 90	8.90	12.62	250
300	471	60		8 -M20× 100	11.10	15.21	300
350	538	62	10-M20×48	10 -M20× 100	14.40	19.47	350
400	594	67	12-M20×48	12 -M20× 110	19.20	25.58	400
450	647	70			21.70	28.20	450
500	700	75	14-M20×48	14 -M20× 110	25.80	32.32	500
600	803	80		14 -M20× 120	35.80	43.69	600
700	937	96	16-M22×60	16 -M24× 120	58.00	71.86	700
800	1040	100	20-M22×60	20 -M24× 120	70.00	87.02	800
900	1187	105	20-M24×75	20 -M30× 130	90.00	119.78	900
1000	1291	110			105.00	135.26	1000
1100	1394	115	24-M24×75	24 -M30× 140	123.00	160.12	1100
1200	1498	120	28-M24×75	28 -M30× 140	144.44	187.41	1200
1350	1652	130		28 -M30× 150	186.96	231.89	1350
1500	1808				215.50	263.23	1500
1600	1910	135	30-M24×75	30 -M30× 150	215.59	267.43	1600
1650	1965	140			224.39	276.51	1650
1800	2108	150	34-M24×75	34 -M30× 150	258.86	320.86	1800