


スーパージョイント® SJ-K型

ゴム伸縮可撓管



構造物とFRPM管との取合部に設置されたスーパージョイント口径3000mm

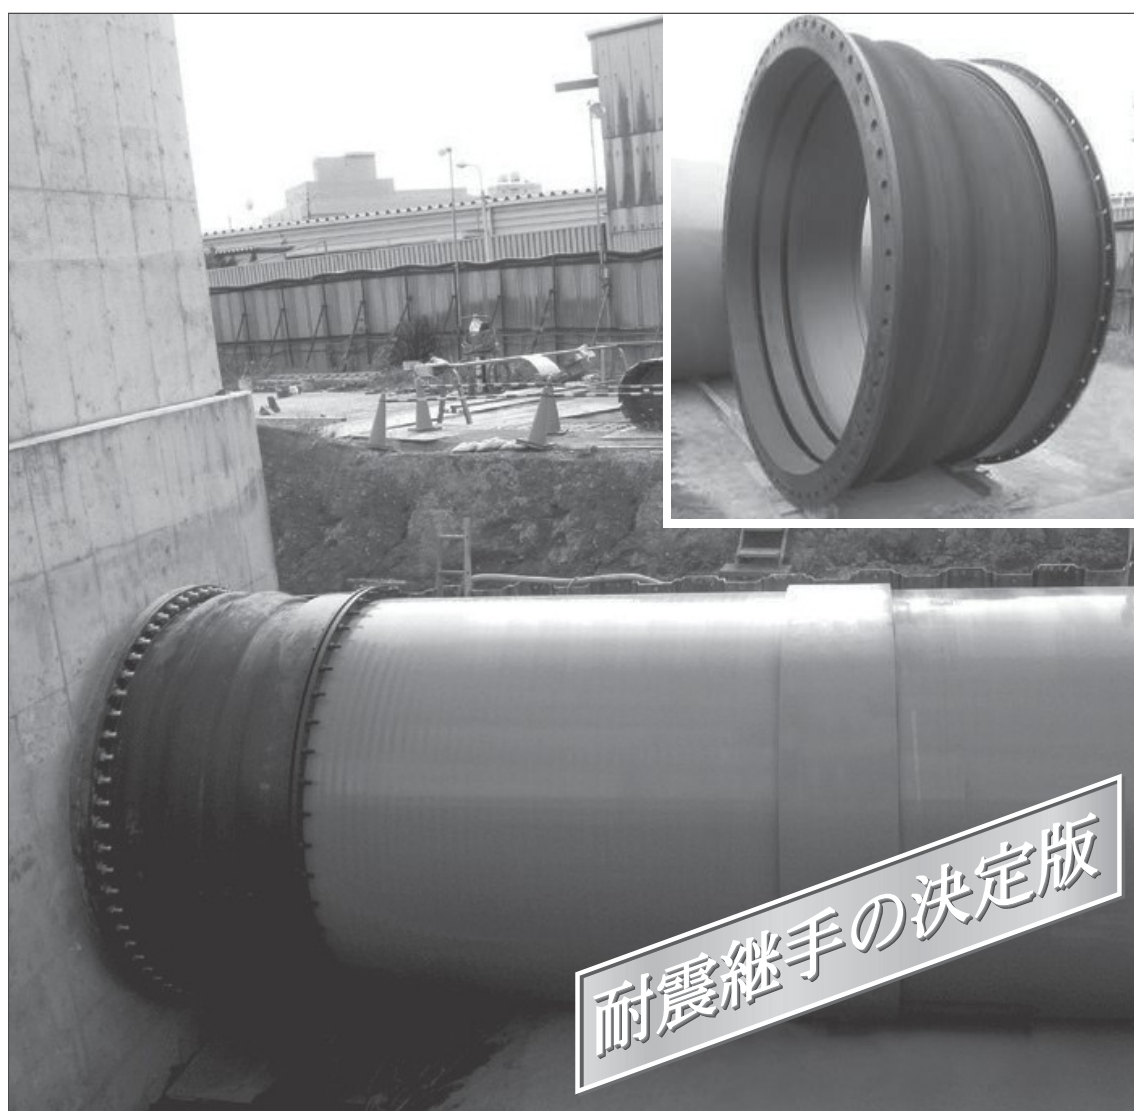

MIWA GROUP
西武ポリマ化成株式会社

ゴム伸縮可撓管 スーパージョイント

沈下量 100 mm 用

口径	低圧 SJ-K100L 型			中圧 (塩ビ管用・FRPM 管用) SJ-K100S 型		
	常用圧力：max0.33MPa 試験圧力：0.5MPa			常用圧力：max0.5MPa 試験圧力：0.75MPa		
	面間	定価	GF 接続	面間	定価	GF 接続
50	500	199,000		500	199,000	
75(80)	500	213,000	×	500	213,000	×
100	500	260,000	×	500	260,000	×
125	500	281,000	×	500	281,000	×
150	500	305,000	×	500	305,000	×
200	500	367,000	×	500	367,000	×
250	550	407,000	×	550	407,000	×
300	550	478,000	×	550	478,000	×
350	600	605,000	×	600	605,000	×
400	600	681,000	×	600	681,000	×
450	600	758,000	×	600	758,000	×
500	600	873,000	×	600	873,000	×
600	650	1,044,000	×	650	1,201,000	×
700	650	1,245,000	×	650	1,432,000	×
800	650	1,500,000	×	650	1,724,000	×
900	650	1,806,000	×	650	2,076,000	×
1000	650	2,084,000	×	650	2,396,000	×
1100	650	2,301,000	×	650	2,646,000	×
1200	650	2,693,000	×	650	3,097,000	×
1350	700	3,232,000	×	700	3,717,000	×
1500	700	3,789,000	×	700	4,358,000	×
1600	750	4,387,000	×	750	5,045,000	×
1650	750	4,535,000	×	750	5,214,000	×
1800	750	5,387,000	×	750	6,196,000	×
2000	800	6,299,000	×	800	7,244,000	×
2100	800	6,921,000	×	800	7,959,000	×
2200	800	7,761,000	×	800	8,925,000	×

沈下量 100 mm 用

口径	高压 SJ-K100H 型		
	常用压力：max1.0MPa 試験压力：1.5MPa		
	面間	定価	GF 接続
50	500	224,000	
75(80)	500	244,000	×
100	500	322,000	×
125	500	353,000	×
150	500	386,000	×
200	500	475,000	×
250	550	548,000	×
300	550	636,000	×
350	600	801,000	×
400	600	928,000	×
450	600	1,052,000	×
500	600	1,206,000	×
600	1050	1,488,000	○
700	1050	1,835,000	○
800	1050	2,134,000	○
900	1050	2,384,000	○
1000	1200	2,808,000	○
1100	1200	3,161,000	○
1200	1200	3,636,000	○
1350	1200	4,294,000	○
1500	1200	5,088,000	○
1600	1450	5,741,000	○
1650	1450	5,989,000	○
1800	1450	7,141,000	○
2000	1450	7,946,000	○
2100	1600	9,248,000	○
2200	1600	10,127,000	○

ゴム伸縮可撓管 スーパージョイント

沈下量 200 mm 用

口径	低圧 SJ-K200L 型			中圧（塩ビ管・FRPM 管用） SJ-K200S 型		
	常用圧力：max0.33MPa 試験圧力：0.5MPa			常用圧力：max0.5MPa 試験圧力：0.75MPa		
	面間	定価	GF 接続	面間	定価	GF 接続
50	700	240,000		700	240,000	
75(80)	700	258,000	×	700	258,000	×
100	700	299,000	×	700	299,000	×
125	700	321,000	×	700	321,000	×
150	700	348,000	×	700	348,000	×
200	700	421,000	×	700	421,000	×
250	700	481,000	×	700	481,000	×
300	700	556,000	×	700	556,000	×
350	750	695,000	×	750	695,000	×
400	750	768,000	×	750	768,000	×
450	750	834,000	×	750	834,000	×
500	750	998,000	×	750	998,000	×
600	800	1,215,000	×	800	1,396,000	×
700	800	1,416,000	×	800	1,681,000	×
800	800	1,671,000	×	800	1,921,000	×
900	800	2,005,000	×	800	2,305,000	×
1000	900	2,285,000	×	900	2,627,000	×
1100	900	2,571,000	×	900	2,956,000	×
1200	900	2,940,000	×	900	3,380,000	×
1350	950	3,511,000	×	950	4,036,000	×
1500	950	4,175,000	×	950	4,801,000	×
1600	1000	4,876,000	×	1000	5,606,000	×
1650	1000	5,036,000	×	1000	5,791,000	×
1800	1000	5,858,000	×	1000	6,736,000	×
2000	1050	6,873,000	×	1050	7,904,000	×
2100	1050	7,663,000	×	1050	8,811,000	×
2200	1050	8,457,000	×	1050	9,726,000	×

沈下量 200 mm 用

口径	高压 SJ-K200H 型		
	常用压力：max1.0MPa 試験压力：1.5MPa		
	面間	定価	GF 接続
50	700	255,000	
75(80)	700	279,000	×
100	700	404,000	×
125	700	438,000	×
150	700	491,000	×
200	700	687,000	×
250	700	774,000	×
300	700	874,000	×
350	750	1,064,000	×
400	750	1,191,000	×
450	750	1,378,000	×
500	750	1,510,000	×
600	1300	1,793,000	○
700	1300	2,216,000	○
800	1300	2,629,000	○
900	1300	2,944,000	○
1000	1500	3,570,000	○
1100	1500	3,949,000	○
1200	1500	4,503,000	○
1350	1500	5,271,000	○
1500	1500	6,467,000	○
1600	1800	7,087,000	○
1650	1800	7,520,000	○
1800	1800	8,759,000	○
2000	1800	9,760,000	○
2100	2000	10,744,000	○
2200	2000	12,136,000	○