


共通寸法

ベル受口


- VHベル (50~300)
- VPベル-L (50~300)



単位: mm

呼び径	内径d1	内径d2	有効挿込長さ e	受口長さ l
50	60.9	70.0	77	110
75	90.2	102.1	79	120
100	115.3	129.2	83	130
125	141.4	155.1	84	135
150	166.6	180.8	92	145
200	218.0	233.4	102	170
250	269.3	287.4	108	185
300	320.7	340.6	113	200


- VPベル (200~300)
- ※ベル片受直管 (有効長 = 5m) のみ



単位: mm

呼び径	内径d	有効挿込長さ e (最小)	受口長さ l
200	218.0	76	170
250	269.3	82	185
300	320.7	88	200

- VMベル (350~500)
- VUベル (75~600)
- VPベル-L (40)




単位: mm

呼び径	内径d	有効挿込長さ e (最小)	受口長さ l	管種
40	48.6	61	100	VP
75	90.2	61	125	VU
100	115.3	64	137	VU
125	141.4	67	145	VU
150	166.6	70	156	VU
200	218.0	76	170	VU
250	269.3	82	185	VU
300	320.7	88	200	VU
350	373.0	89	220	VU-VM
400	422.5	91	235	VU-VM
450	473.7	94	255	VU-VM
500	524.1	96	275	VU-VM
600	636.1	102	315	VU


TS受口

- A形

(40, 50)




(65 ~ 150)




- B形

(40 ~ 150)



(200 ~ 600)



単位: mm

呼び径	内径d1	受口長さ l	テーパ- 1/T	厚さt (最小)	d1' (最小)	d (最小)	D
40	48.7	55.0	1/37	4.5	—	40	57
50	60.8	63.0	1/37	5.0	—	51	70
65	76.6	61.0	1/48	6.6	76.9	67	87
75	89.6	64.0	1/49	8.0	89.9	77	102
100	114.7	84.0	1/56	10.0	115.0	100	130
125	140.9	104.0	1/58	11.0	141.1	125	157
150	166.0	132.0	1/63	13.0	166.4	146	186

注: 破線で示す形状にすることができます。


単位: mm

呼び径	d1	d2	受口長さ l	テーパ- 1/T
40	48.7	47.2	55	1/37
50	60.8	59.1	63	1/37
65	76.6	75.2	61	1/48
75	89.6	88.3	64	1/49
100	114.7	113.2	84	1/56
125	140.9	139.1	104	1/58
150	166.0	163.9	132	1/63
200	217.9	213.9	200	1/50
250	269.3	264.3	250	1/50
300	320.7	314.7	300	1/50
350	373.1	366.1	350	1/50
400	423.6	415.6	400	1/50
450	474.0	465.0	450	1/50
500	524.5	514.5	500	1/50
600	635.3	623.3	600	1/50

ブレンエンド直管 (全長=4m)

略号 PE

VH50～300：AS60規格品
VP、VM、VU：JIS K 6741規格品



単位：mm

呼び径	VH				VP-VM				VU				品 番			定価(円)		
	外径 D	最少厚さ t	近径内径 d	1m当りの 質量(kg) (参考)	外径 D	最少厚さ t	近径内径 d	1m当りの 質量(kg) (参考)	外径 D	最少厚さ t	近径内径 d	1m当りの 質量(kg) (参考)	VH	VP-VM	VU	VH	VP-VM	VU
40	—	—	—	—	48.0	3.6	40	0.791	3.2	48.0	1.8	44	0.413	1.7	—	—	—	—
50	60.0	4.6	50	1.235	4.9	60.0	4.1	51	1.122	4.5	60.0	1.8	56	0.521	2.1	VH504	VP404	VU404
65	—	—	—	—	76.0	4.1	67	1.445	5.8	76.0	2.2	71	0.825	3.3	—	—	—	—
75	89.0	6.2	76	2.443	9.8	89.0	5.5	77	2.202	8.8	89.0	2.7	83	1.159	4.6	VH754	VP754	VU754
100	114.0	7.6	98	3.854	15.4	114.0	6.6	100	3.409	13.6	114.0	3.1	107	1.737	6.9	VH1H4	VP1H4	VU1H4
125	—	—	—	—	140.0	7.0	125	4.464	17.9	140.0	4.1	131	2.739	11.0	—	—	—	—
150	165.0	10.5	143	7.739	31.0	165.0	8.9	146	6.701	26.8	165.0	5.1	154	3.941	15.8	VH1F4	VP1F4	VU1F4
200	216.0	12.1	189	11.898	47.6	216.0	10.3	194	10.129	40.5	216.0	6.5	202	6.572	26.3	VH2H4	VP2H4	VU2H4
250	267.0	15.0	235	18.200	72.8	267.0	12.7	240	15.481	61.9	267.0	7.8	250	9.758	39.0	VH2F4	VP2F4	VU2F4
300	318.0	17.8	280	25.710	102.8	318.0	15.1	286	21.962	87.8	318.0	9.2	298	13.701	54.8	VH3H4	VP3H4	VU3H4
350	—	—	—	—	370.0	14.3	339	24.378	97.5	370.0	10.5	348	18.051	72.2	—	—	—	—
400	—	—	—	—	420.0	16.2	385	31.294	125.2	420.0	11.8	395	23.059	92.2	—	—	—	—
450	—	—	—	—	470.0	18.1	431	39.267	157.1	470.0	13.2	442	28.875	115.5	—	—	—	—
500	—	—	—	—	520.0	20.0	477	47.930	191.7	520.0	14.6	489	35.346	141.4	—	—	—	—
600	—	—	—	—	—	—	—	—	—	630.0	17.8	592	52.679	210.7	—	—	—	—


ベル片受直管 (有効長=5m)

略号 RR


VHベル50～300：AS60規格品
VPベル-L40：メーカー規格品
VPベル-L50～150：JWWA K 129規格品
VPベル-L125：AS33規格品
VPベル200～300、VMベル、VUベル：JIS K 6741規格品




●VHベル
VPベル-L用 (50～150)

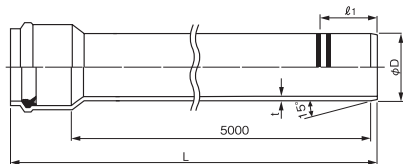

●VPベル (200～300)



●VPベル-L (40)
VMベル・VUベル

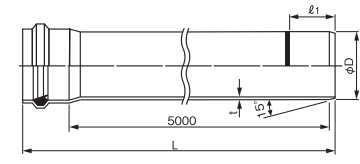

単位：mm


VHベル													VPベル・VPベル-L・VMベル					VUベル					品 番			定価(円)		
呼び径	外径 D	最少厚さ t	標準長さ の長さ L	全長	参考質量 (kg/本)	外径 D	最少厚さ t	標準長さ の長さ L	全長	参考質量 (kg/本)	外径 D	最少厚さ t	標準長さ の長さ L	全長	参考質量 (kg/本)	VHベル	VPベル VPベル-L VMベル	VUベル	VHベル	VPベル VPベル-L VMベル	VUベル							
40	—	—	—	—	—	48.0	3.6	101	5107	4.0	—	—	—	—	—	—	BW405	—	—	5,800	—							
50	60.0	4.6	109	5120	6.4	60.0	4.1	107	5118	5.8	—	—	—	—	—	VHR505	BW505L	—	9,030	7,990	—							
75	89.0	6.2	122	5133	12.8	89.0	5.5	120	5131	11.5	89.0	2.7	131	5131	6.0	VHR755	BW755L	BUN755	17,590	15,660	6,690							
100	114.0	7.6	135	5146	20.2	114.0	6.6	132	5143	17.8	114.0	3.1	144	5144	9.0	VHR1H5	BW1HL	BUN1H5	28,450	23,390	9,970							
125	—	—	—	—	—	140.0	7.0	138	5149	23.4	140.0	4.1	154	5154	14.2	—	BP105L	BUN1Q5	—	31,350	16,540							
150	165.0	10.5	156	5167	40.8	165.0	8.9	152	5163	35.2	165.0	5.1	167	5167	20.4	VHR1F5	BW1FL	BUN1F5	56,650	45,130	23,890							
200	216.0	12.1	180	5196	62.9	216.0	10.3	175	5192	53.2	216.0	6.5	184	5184	34.2	VHR2H5	NBP2H5	BUN2H5	86,470	59,730	39,460							
250	267.0	15.0	201	5217	96.2	267.0	12.7	194	5212	81.7	267.0	7.8	202	5202	51.0	VHR2F5	NBP2F5	BUN2F5	129,870	91,620	58,470							
300	318.0	17.8	222	5238	137.5	318.0	15.1	214	5232	116.6	318.0	9.2	220	5220	72.0	VHR3H5	NBP3H5	BUN3H5	207,040	117,480	81,380							
350	—	—	—	—	—	370.0	14.3	251	5251	128.8	370.0	10.5	242	5242	95.2	—	BMN3F5	BUN3F5	—	136,090	111,300							
400	—	—	—	—	—	420.0	16.2	270	5270	166.0	420.0	11.8	260	5260	122.1	—	BMN4H5	BUN4H5	—	180,410	147,300							
450	—	—	—	—	—	470.0	18.1	294	5294	209.5	470.0	13.2	283	5283	153.9	—	BMN4F5	BUN4F5	—	230,200	187,400							
500	—	—	—	—	—	520.0	20.0	318	5318	257.1	520.0	14.6	306	5306	189.1	—	BMN5H5	BUN5H5	—	289,540	237,490							
600	—	—	—	—	—	—	—	—	—	—	630.0	17.8	353	5353	283.9	—	—	BUN6H5	—	—	364,940							

■ VPは呼び径40～300、VMは呼び径350～500です。

ベル片受直管（有効長＝4m）

略号 RR

VMベル、VUベル：JIS K 6741規格品




単位：mm

呼び径	VHベル					VMベル					VUベル					品 番			定価(円)	
	外径 D	最少厚さ t	標準までの長さ L1	全長 L	参考質量 (kg/本)	外径 D	最少厚さ t	標準までの長さ L1	全長 L	参考質量 (kg/本)	外径 D	最少厚さ t	標準までの長さ L1	全長 L	参考質量 (kg/本)	VHベル	VMベル	VUベル	VMベル	VUベル
75	—	—	—	—	—	—	—	—	—	—	89.0	2.7	131	4131	4.8	—	—	BUN754	—	5,480
100	—	—	—	—	—	—	—	—	—	—	114.0	3.1	144	4144	7.2	—	—	BUN1H4	—	8,180
125	—	—	—	—	—	—	—	—	—	—	140.0	4.1	154	4154	11.4	—	—	BUN1Q4	—	13,560
150	—	—	—	—	—	—	—	—	—	—	165.0	5.1	167	4167	16.5	—	—	BUN1F4	—	19,580
200	—	—	—	—	—	—	—	—	—	—	216.0	6.5	184	4184	27.7	—	—	BUN2H4	—	32,330
250	—	—	—	—	—	—	—	—	—	—	267.0	7.8	202	4202	41.3	—	—	BUN2F4	—	47,920
300	—	—	—	—	—	—	—	—	—	—	318.0	9.2	220	4220	58.3	—	—	BUN3H4	—	66,730
350	—	—	—	—	—	370.0	14.3	251	4251	104.5	370.0	10.5	242	4242	77.2	—	BMN3F4A	BUN3F4	110,620	91,220
400	—	—	—	—	—	420.0	16.2	270	4270	134.7	420.0	11.8	260	4260	99.0	—	BMN4H4A	BUN4H4	146,690	120,760
450	—	—	—	—	—	470.0	18.1	294	4294	170.2	470.0	13.2	283	4283	125.0	—	BMN4F4A	BUN4F4	187,130	153,600
500	—	—	—	—	—	520.0	20.0	318	4318	209.2	520.0	14.6	306	4306	153.8	—	BMN5H4A	BUN5H4	235,400	194,690
600	—	—	—	—	—	—	—	—	—	—	630.0	17.8	353	4353	231.3	—	—	BUN6H4	—	299,110

TS片受直管（有効長＝4m）

略号 TS

VP、VM、VU：JIS K 6741規格品



単位：mm

呼び径	VP				VM				VU				品 番			定価(円)		
	外径 D	最少厚さ t	全長 L	参考質量 (kg/本)	外径 D	最少厚さ t	全長 L	参考質量 (kg/本)	外径 D	最少厚さ t	全長 L	参考質量 (kg/本)	VP	VM	VU	VP	VM	VU
40	48.0	3.6	4063	3.2	—	—	—	—	48.0	1.8	4059	1.8	VPS404N	—	VUS404N	3,940	—	2,120
50	60.0	4.1	4072	4.9	—	—	—	—	60.0	1.8	4067	2.1	VPS504N	—	VUS504N	5,490	—	2,480
65	76.0	4.1	4070	5.9	—	—	—	—	76.0	2.2	4066	3.4	VPS654N	—	VUS654N	6,630	—	3,780
75	89.0	5.5	4076	9.0	—	—	—	—	89.0	2.7	4070	4.7	VPS754N	—	VUS754N	10,150	—	5,030
100	114.0	6.6	4098	14.0	—	—	—	—	114.0	3.1	4091	7.1	VPS1H4N	—	VUS1H4N	15,040	—	7,580
125	140.0	7.0	4119	18.5	—	—	—	—	140.0	4.1	4113	11.3	VPS1Q4N	—	VUS1Q4N	19,420	—	12,290
150	165.0	8.9	4151	27.9	—	—	—	—	165.0	5.1	4143	16.4	VPS1F4N	—	VUS1F4N	29,280	—	17,790
200	216.0	10.3	4222	43.1	—	—	—	—	216.0	6.5	4214	27.9	VPS2H4N	—	VUS2H4N	44,630	—	29,780
250	267.0	12.7	4277	66.7	—	—	—	—	267.0	7.8	4267	42.0	VPS2F4N	—	VUS2F4N	70,060	—	45,250
300	318.0	15.1	4332	95.9	—	—	—	—	318.0	9.2	4320	59.7	VPS3H4N	—	VUS3H4N	92,100	—	64,230
350	—	—	—	—	370.0	14.3	4381	107.8	370.0	10.5	4372	79.6	—	VMS3F4A	VUS3F4N	—	109,600	87,680
400	—	—	—	—	420.0	16.2	4435	140.0	420.0	11.8	4425	103.0	—	VMS4H4A	VUS4H4N	—	147,240	117,210
450	—	—	—	—	470.0	18.1	4489	178.1	470.0	13.2	4478	130.7	—	VMS4F4A	VUS4F4N	—	188,770	149,890
500	—	—	—	—	520.0	20.0	4543	220.2	520.0	14.6	4531	161.9	—	VMS5H4A	VUS5H4N	—	239,220	190,360
600	—	—	—	—	—	—	—	—	630.0	17.8	4638	247.1	—	—	VUS6H4N	—	—	293,660