

離脱防止押輪 全周型 CMA

- 1、 押輪のボルト孔相互間に設けられた押しボルト、弓形爪 により構成
- 2、 弓形爪は皿ばね状で、管外周の60~92%を拘束
- 3、 ダクタイル鋳鉄管の内面モルタルライニングには悪影響を与えません。




(単位:円)

呼び径	本体	付属品価格						Kゴム輪	酸化被膜 組価格	合金 組価格	SUS304 組価格	呼び径
		T頭ボルト・ナット										
		酸化被膜		合金		SUS304						
		単価	価格	単価	価格	単価	価格					
75	7,350	390	1,560	590	2,360	2,020	8,080	1,600	10,510	11,310	17,030	75
100	8,760	460	1,840	660	2,640	2,850	11,400	1,790	12,390	13,190	21,950	100
150	13,080	460	2,760	660	3,960	2,850	17,100	2,500	18,340	19,540	32,680	150
200	16,210	460	2,760	660	3,960	2,850	17,100	3,120	22,090	23,290	36,430	200
250	22,240	460	3,680	660	5,280	2,850	22,800	4,020	29,940	31,540	49,060	250
300	25,100	530	4,240	760	6,080	2,890	23,120	7,120	36,460	38,300	55,340	300
350	39,580	530	5,300	760	7,600	2,890	28,900	8,690	53,570	55,870	77,170	350
400	51,070	590	7,080	860	10,320	2,970	35,640	9,720	67,870	71,110	96,430	400
450	58,990	590	7,080	860	10,320	2,970	35,640	10,520	76,590	79,830	105,150	450
500	67,470	590	8,260	860	12,040	2,970	41,580	10,960	86,690	90,470	120,010	500
600	84,540	630	8,820	950	13,300	3,060	42,840	11,720	105,080	109,560	139,100	600
700	126,730	1,000	16,000	1,350	21,600	5,470	87,520	16,140	158,870	164,470	230,390	700
800	168,690	1,000	20,000	1,350	27,000	5,470	109,400	19,830	208,520	215,520	297,920	800
900	320,060	1,460	29,200	2,040	40,800	8,450	169,000	20,970	370,230	381,830	510,030	900
1000	342,120	1,460	29,200	2,040	40,800	8,450	169,000	26,820	398,140	409,740	537,940	1000
1100	455,300	1,490	35,760	2,160	51,840	8,640	207,360	32,920	523,980	540,060	695,580	1100
1200	537,170	1,490	41,720	2,160	60,480	8,640	241,920	34,470	613,360	632,120	813,560	1200
1350	605,880	1,610	45,080	2,310	64,680	9,380	262,640	46,940	697,900	717,500	915,460	1350
1500	1,033,730	1,610	45,080	2,310	64,680	9,380	262,640	51,410	1,130,220	1,149,820	1,347,780	1500
1600	1,248,640	1,610	48,300	2,310	69,300	9,380	281,400	87,400	1,384,340	1,405,340	1,617,440	1600
1650	1,326,420	1,610	48,300	2,310	69,300	9,380	281,400	91,600	1,466,320	1,487,320	1,699,420	1650
1800	1,684,820	1,610	54,740	2,310	78,540	9,380	318,920	100,500	1,840,060	1,863,860	2,104,240	1800

※ 同芯ゴム輪K形を用いれば、現場で簡単に芯出しができます(φ75~700)。

(mm)

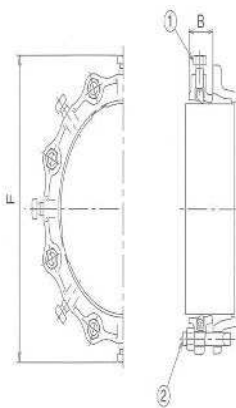

呼び径	F	B	①押しボルト	②T頭ボルト	重量(kg)		呼び径
					本体のみ	組 酸化被膜	
75	229	51	2-M20×38	4 -M16× 85	2.30	3.41	75
100	260	52	2-M20×40	4 -M20× 90	3.10	4.94	100
150	313	54	3-M20×40	6 -M20× 90	4.90	7.63	150
200	366	52	6-M20×40		6.20	9.03	200
250	419	58	8-M20×40	8 -M20× 90	8.90	12.62	250
300	471	60		8 -M20× 100	11.10	15.21	300
350	538	62	10-M20×48	10 -M20× 100	14.40	19.47	350
400	594	67	12-M20×48	12 -M20× 110	19.20	25.58	400
450	647	70			21.70	28.20	450
500	700	75	14-M20×48	14 -M20× 110	25.80	32.32	500
600	803	80		14 -M20× 120	35.80	43.69	600
700	937	96	16-M22×60	16 -M24× 120	58.00	71.86	700
800	1040	100	20-M22×60	20 -M24× 120	70.00	87.02	800
900	1187	105	20-M24×75	20 -M30× 130	90.00	119.78	900
1000	1291	110			105.00	135.26	1000
1100	1394	115	24-M24×75	24 -M30× 140	123.00	160.12	1100
1200	1498	120			144.44	187.41	1200
1350	1652	130	28-M24×75	28 -M30× 150	186.96	231.89	1350
1500	1808				215.50	263.23	1500
1600	1910	135	30-M24×75	30 -M30× 150	215.59	267.43	1600
1650	1965	140			224.39	276.51	1650
1800	2108	150	34-M24×75	34 -M30× 150	258.86	320.86	1800