

塩ビ製継手 ベル継手 TS継手 / 関連部材

受注生産品

■ベル継手

共通寸法

受口部

※本管「共通寸法」(P.562)のベル受口を参照してください。


ベルソケット

略号 S

単位: mm



●VHベル、VPベル-L



呼び径	VHベル			VPベル-L			品番		定価(円)	
	L	Z	参考質量(kg/個)	L	Z	参考質量(kg/個)	VHベル	VPベル-L	VHベル	VPベル-L
50	340	120	0.6	290	70	0.5	VHS50	BS50L	2,640	2,040
75	370	130	1.4	320	80	1.1	VHS75	BS75LN	4,620	3,720
100	400	140	2.4	340	80	1.8	VHS1H	BS1HLN	6,380	5,160
125	—	—	—	360	90	2.7	—	BS1QL	—	9,520
150	450	160	5.7	390	100	4.0	VHS1F	BS1FLN	15,840	12,660
200	540	200	8.8	540	200	7.6	VHS2H	BSW2HL	32,340	25,720
250	665	295	16.2	665	295	14.1	VHS2F	BSW2FL	45,210	36,010
300	725	325	25.1	725	325	21.9	VHS3H	BSW3HL	66,220	52,730


ベル径違いソケット(一段落ち)

略号 R

単位: mm



●VHベル、VPベル-L



呼び径	VHベル			VPベル-L			品番		定価(円)	
	L	Z	参考質量(kg/個)	L	Z	参考質量(kg/個)	VHベル	VPベル-L	VHベル	VPベル-L
75×50	360	230	1.2	358	230	1.2	VHT7550	BS752LN	6,160	4,790
100×75	378	235	2.1	376	235	2.0	VHT1H75	BS1H1LN	8,910	7,210
125×100	—	—	—	413	265	3.2	—	BS1Q1L	—	11,750
150×100	486	325	5.1	483	325	4.7	VHT1F1H	BS1F2LN	19,250	15,740
150×125	—	—	—	464	305	4.8	—	BS1F1LN	—	18,350
200×150	582	390	9.3	578	390	8.1	VHT2H1F	BSW2H1L	35,860	28,500
250×200	641	430	15.6	636	430	13.6	VHT2F2H	BSW2F1L	46,310	36,890
300×250	692	460	23.8	685	460	20.7	VHT3H2F	BSW3H1L	66,110	52,560


受差し短管

略号 SP


単位: mm



●VHベル




●VPベル-L



呼び径	VHベル			VPベル-L			品番		定価(円)	
	L	Z	参考質量(kg/個)	L	Z	参考質量(kg/個)	VHベル	VPベル-L	VHベル	VPベル-L
50	290	170	0.5	215	105	0.3	VHST50	B50TL	2,530	1,930
75	320	187	1.0	240	120	0.8	VHST75	B75TLN	3,630	2,810
100	340	194	1.8	275	145	1.3	VHST1H	B1HTLN	5,940	4,720
125	—	—	—	305	170	1.9	—	B1QTL	—	6,600
150	390	223	4.2	355	210	3.4	VHST1F	B1FTLN	15,620	12,210
200	540	344	8.5	455	285	6.0	VHST2H	BTWS2HL	30,690	22,630
250	665	448	16.1	665	480	13.2	VHST2F	BTWS2FL	41,470	35,240
300	725	487	23.1	750	550	21.0	VHST3H	BTWS3HL	62,920	51,440

Sベンド(H=300)

略号 S-B




単位: mm

呼び径	VPベル-L					品番		定価(円)
	ℓ	L	H	R	S	VPベル-L	VPベル-L	
50	530	648	250	150	185	BSB50L	9,660	
75	715	846	300	250	200	BSB75LN	10,180	
100	785	928	300	300	205	BSB1HLN	15,900	
125	910	1059	300	400	215	BSB1QL	25,990	
150	1015	1178	300	475	240	BSB1FLN	46,960	


H=450, 600も生産可能です。

ベルグリップV型


略号 BGN-V

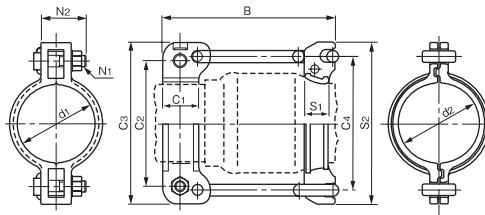

(125, 200)



(250, 300)



単位: mm

呼び径	d1	d2	C1	C2	C3	C4	B	S1	S2	N1	N2	品番	定価(円)
40	48	48.5	40	110	156	110	189.0	25.5	140	M16	50	BG40VN	6,740
50	60	62.5	40	104	158	126	196.0	30.0	160	M12	65	BG50VN	7,720
75	89	91.0	40	139	200	164	224.0	30.0	204	M12	65	BG75VN	8,590
100	114	116.0	50	164	236	196	249.0	35.0	236	M12	65	BG1HVN	9,650
125	140	142.0	60	226	280	226	273.5	49.0	270	M16	65	BG1QVN	19,710
150	165	168.0	62	230	306	260	286.0	52.0	310	M16	65	BG1FVN	19,820
200	216	218.0	75	330	390	330	324.5	62.0	382	M20	90	BG2HVN	47,960
250	267	269.0	100	322	450	404	378.0	78.0	462	M16	100	BG2FVN	80,750
300	318	320.0	120	375	523	454	420.0	90.0	535	M16	110	BG3HVN	112,500

注 1. 本体の材質は、JIS G 5502 (球体黒鉛鑄鉄品) の2種 (FCD450) です。
2. 本体の内面は、エポキシ樹脂粉体塗装または液体エポキシ樹脂塗装です。